

Single-axis controller S27



The single-axis controller S27 is a hall sensor switching device designed for electro-hydraulic and remote controlled hydraulic. The modular design of the switching device is universally applicable. The single-axis controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.

Technical data

Mechanical life S27	6 million operating cycles
Operating temperature	-40°C to +85°C
Degree of protection	up to IP65, electronic assembly IP67




Example

	S27L	M	- Z	- E...	- S...	- X
Basic unit						
S27L left						
S27R right						
Grip / palm grip						
Knob (standard)						
M Mechanical zero interlock						
Q T-grip						
Z Spring return						
R Friction brake						
Interface (description on the following pages)						
E0xx Digital output						
E1xx Voltage output						
E2xx Current output						
Plug connectors						
S.. Standard plug connectors (see page 138)						
Special model						
X Special / customer specific						

Identification of the installation variants

with switching directions:

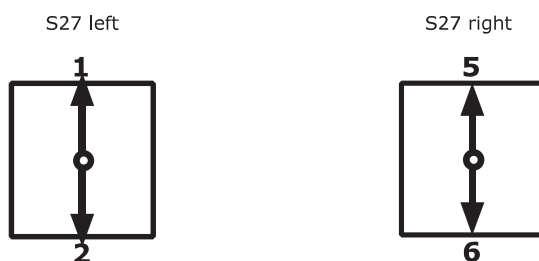

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Digital Output

Supply voltage	9-32 V DC	
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA	
Wiring	Cable 500 mm long without plug connector	
	Optional with plug connector (<i>standard plug connectors see page 138</i>)	S
2 direction signals + 1 zero position signal (galvanically isolated)		
	1 axis	E001 1

Voltage output (not stabilized)

Supply voltage	4,75-5,25 V DC	
Current carrying capacity	Direction signal 8 mA	
Wiring	Cable 500 mm long without plug connector	
	Optional with plug connector (<i>standard plug connectors see page 138</i>)	S
0,5...2,5...4,5 V redundant + 2 direction signals		
	1 axis	E104 1
Output options		
Characteristic:		
Inverse dual		1
Dual		2
Inverse dual with dead zone +/- 3° (standard)		3
Dual with dead zone +/- 3°		4

Voltage output

Supply voltage	9-32 V DC (*11,5-32 V)	
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA	
Wiring	Cable 500 mm long without plug connector	
	Optional with plug connector (<i>standard plug connectors see page 138</i>)	S
0,5...2,5...4,5 V redundant + 2 direction signals + 1 zero position signal (galvanically isolated)		
	1 axis	E112 1
0...5...10 V redundant + 2 direction signals + 1 zero position signal (galvanically isolated), supply voltage 11,5 - 32 V DC		
	1 axis	E132 1
10...0...10 V + 2 direction signals + 1 zero position signal (galvanically isolated), supply voltage 11,5 - 32 V DC, sensor redundant with error monitoring and error signal		
	1 axis	E136 1
Output options		
Characteristic:		
Inverse dual *1		1
Dual *1		2
Inverse dual with dead zone +/- 3° *1 (standard)		3
Dual with dead zone +/- 3° *1		4
*1 not combinable with output E136X		
Single *2		5
Single with dead zone *2 (standard)		6
*2 not combinable with output E112X and E132X		

Voltage output with other value on request!




Current output

Supply voltage	9-32 V DC	
Current carrying capacity	Direction signal 150 mA	
	Zero position signal 500 mA	
Wiring	Cable 500 mm long without plug connector	
	Optional with plug connector (<i>standard plug connectors see page 138</i>)	
0...10...20 mA + 2 direction signals + 1 zero position signal (galvanically isolated), sensor redundant with error monitoring and error signal	1 axis	E206 1
20...0...20 mA + 2 direction signals + 1 zero position signal (galvanically isolated), sensor redundant with error monitoring and error signal	1 axis	E208 1
4...12...20 mA + 2 direction signals + 1 zero position signal (galvanically isolated), sensor redundant with error monitoring and error signal	1 axis	E214 1
20...4...20 mA + 2 direction signals + 1 zero position signal (galvanically isolated), sensor redundant with error monitoring and error signal	1 axis	E216 1
Output options		
Single		5
Single with dead zone +/-3° (standard)		6

Current output with other value on request!

1

M = Latch for mechanical zero interlock

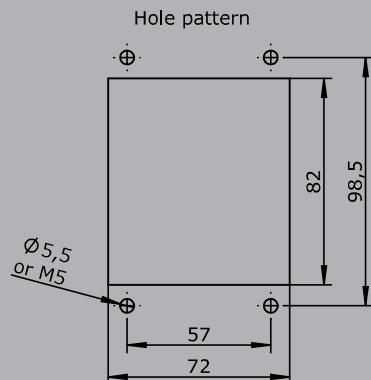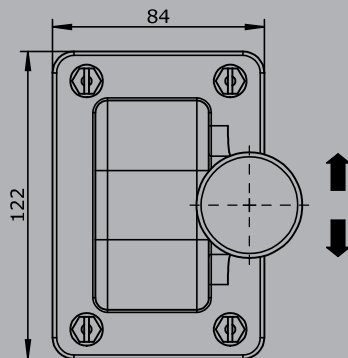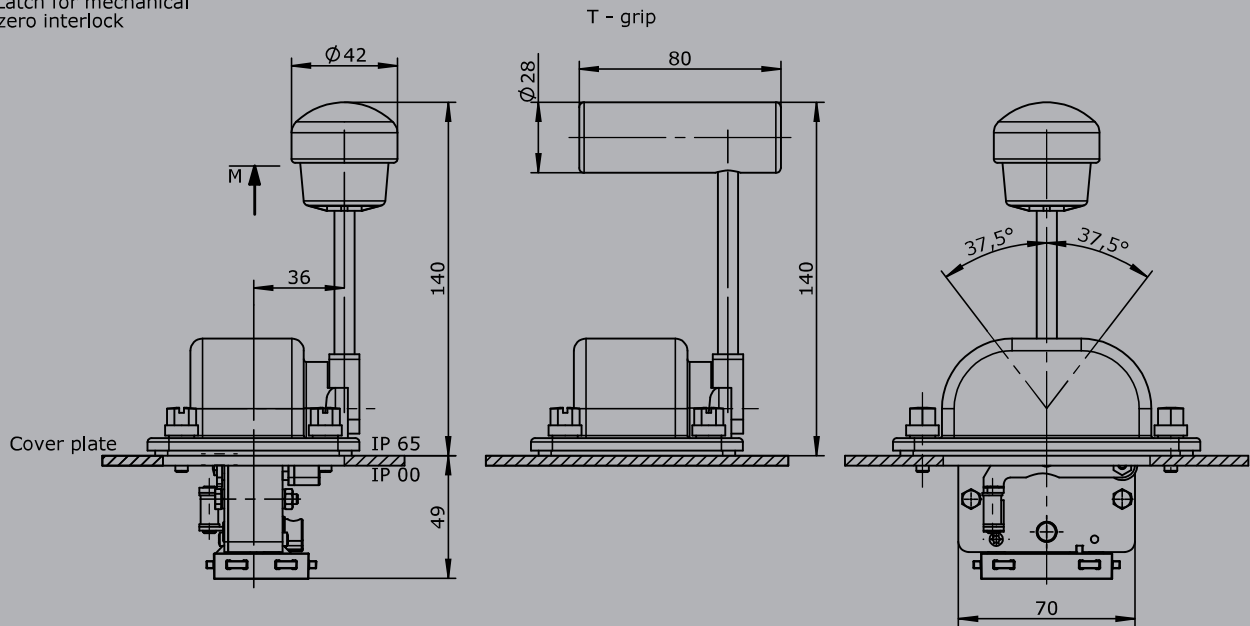

1